


5-1000MHz室内型分支分配器
MW-□7□H

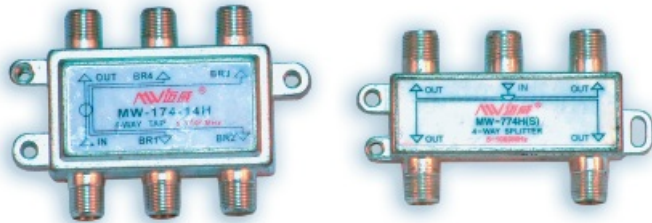

技术指标

项 目		单位	性能参数																							
			一分支器（171—□□H）								二分支器（172—□□H）								三分支器（173—□□H）							
分支损耗	标称值		8	10	12	14	16	18	20	24	8	10	12	14	16	18	20	22	10	12	14	16	18	20	22	24
	允许偏差	dB	±1.5								±1.5								±1.5							
插入损耗 (≤)	5-65MHz	dB	2.5	2.2	2.0	1.8	1.7	1.5	1.2	1.0	4.0	3.3	2.5	2.3	2.0	2.0	1.7	1.7	4.0	3.2	2.5	1.8	1.5	1.2	1.0	1.0
	65-550MHz		2.0	1.8	1.5	1.3	1.2	1.0	0.7	0.5	4.0	3.3	2.5	2.3	2.0	2.0	1.2	1.2	4.0	3.5	2.7	2.0	1.8	1.5	1.2	1.2
	550-750MHz		2.2	2.0	1.8	1.6	1.5	1.5	1.5	1.0	4.5	3.7	2.9	2.7	2.5	2.5	2.0	2.0	4.5	3.5	2.7	2.0	1.8	1.5	1.2	1.2
	750-1000MHz		2.5	2.2	2.0	2.0	1.8	1.8	1.8	2.0	4.5	3.7	2.9	2.7	2.5	2.5	2.0	2.0	4.5	3.8	3.0	2.5	2.0	1.8	1.5	1.5
反向隔离 (≥)	5-65MHz	dB	20	22	22	24	26	28	30	30	22	22	22	26	26	26	30	30	23	25	27	29	30	30	30	30
	65-550MHz		22	22	22	24	26	28	30	30	22	22	22	26	26	26	30	30	23	23	23	27	28	28	28	28
	550-750MHz		22	22	22	22	26	28	30	30	20	20	20	22	22	26	28	28	23	23	23	27	28	28	28	30
	750-1000MHz		20	20	20	22	24	28	26	26	20	20	20	22	22	24	24	24	21	21	21	25	25	25	25	25
相互隔离 (≥)	5-65MHz	dB									20								25							
	65-550MHz										30								28							
	550-750MHz										26								25							
	750-1000MHz										22								22							
反射损耗 (≥)	5-65MHz	dB	14								14								14							
	65-550MHz		16								16								16							
	550-750MHz		14								14								14							
	750-1000MHz		14								14								14							
屏蔽衰减		dB	≥100								≥100								≥100							

项 目		单位	性能参数																							
			四分支器（174—□□H）								六分支器（176—□□H）								八分支器（178—□□H）							
分支损耗	标称值		10	12	14	16	18	20	24	12	14	16	18	20	22	24	26	14	16	18	20	22	24	26	28	
	允许偏差	5-750MHz	±1.5								±1.5								±1.5							
		750-1000MHz	±2.5								±2.5								±2.5							
插入损耗 (≤)	5-65MHz		dB	4.0	4.0	3.5	2.5	2.3	2.0	1.5	4.0	4.0	3.0	2.5	2.0	1.5	1.3	1.3	4.0	4.0	2.5	2.0	1.5	1.5	1.2	1.0
	65-550MHz			4.0	4.0	3.5	2.5	2.3	2.0	1.0	4.0	4.0	3.5	3.0	2.5	1.5	1.3	1.3	4.0	4.0	3.0	2.5	1.5	1.5	1.2	1.5
	550-750MHz			4.3	4.3	4.0	2.8	2.5	2.5	1.8	4.5	4.5	4.0	3.5	3.0	1.5	1.5	1.5	4.5	4.5	3.5	3.0	2.0	1.5	1.5	1.5
	750-1000MHz			4.5	4.5	4.0	3.0	3.0	2.8	2.0	5.0	5.0	4.5	4.0	3.5	1.5	1.5	1.5	5.0	5.0	4.0	3.5	2.5	1.8	1.5	1.5
反向隔离 (≥)	5-65MHz		dB	22	22	24	30	30	30	34	22	24	26	28	30	30	30	32	24	30	30	30	32	34	36	36
	65-550MHz			22	22	24	30	30	30	34	22	24	26	28	30	30	30	32	24	30	30	30	32	34	36	36
	550-750MHz			22	22	24	26	26	30	34	20	22	24	26	26	26	26	28	22	26	28	30	32	34	36	36
	750-1000MHz			20	20	22	24	24	26	26	20	22	24	26	26	26	26	28	20	24	26	26	26	26	28	28

相互隔离 (≥)	5-65MHz	dB	20	20	20	22	22	22	22	25	25	25	25	25	25	25	25	25								
	65-550MHz		23	25	25	30	30	30	30	25	25	25	25	25	25	25	25	25								
	550-750MHz		18	20	20	25	25	25	25	20	20	22	22	22	22	22	22	22								
	750-1000MHz		18	20	20	22	22	22	22	18	18	20	20	20	20	20	20	20								
反射损耗 (≥)	5-65MHz	dB	14								14								14							
	65-550MHz		16								16								16							
	550-750MHz		14								14								14							
	750-1000MHz		14								14								14							
屏蔽衰减		dB	≥100								≥100								≥100							

项 目			单位	性能参数											
				十二分支器（1712—□□□H）						十六分支器（1716—□□□H）					
分支损耗	标称值			18	20	22	24	26	28	18	20	22	24	26	28
	允许偏差	5-750MHz	dB	±1.5						±1.5					
		750-1000MHz		±3.0						±3.0					
插入损耗 （≤）	5-65MHz		dB	4.0	4.0	3.0	2.5	2.0	1.5	4.0	4.0	4.0	4.0	4.0	4.0
	65-550MHz			4.0	4.0	3.0	2.5	2.0	1.5	4.0	4.0	4.0	4.0	4.0	4.0
	550-750MHz			4.5	4.5	3.0	2.5	2.0	1.5	4.5	4.5	4.0	4.0	4.0	4.0
	750-1000MHz			4.5	4.5	3.5	3.0	2.5	2.0	4.5	4.5	4.5	4.5	4.5	4.5
	5-65MHz		dB	30	30	32	34	36	36	30	30	32	34	36	36
	65-550MHz			30	30	32	34	36	36	30	30	32	34	36	36
	550-750MHz			28	30	32	34	36	36	28	30	32	34	36	36
	750-1000MHz			26	26	26	28	28	28	26	26	26	28	28	28
相互隔离 （≥）	5-65MHz		dB	24						24					
	65-550MHz			25						25					
	550-750MHz			23						23					
	750-1000MHz			20						20					
反射损耗 （≥）	5-65MHz		dB	14						14					
	65-550MHz			16						16					
	550-750MHz			14						14					
	750-1000MHz			14						14					
屏蔽衰减			dB	≥100						≥100					